



GS
GREAT SOUTHERN
WOOD PRESERVING[®]
**OUTDOOR
PROJECTS**

PICNIC TABLE



YellaWood[®]
Pressure Treated Pine

Important information about
YellaWood[®] brand products on back

PICNIC TABLE MATERIALS LIST


- 11 2" x 6" x 6' treated lumber
- 2 2" x 6" x 10' treated lumber
- 3 2" x 4" x 8' treated lumber
- 16 4" machine bolts, 3/8" diameter, with 2 washers per bolt
- 1 lb. 8d, double hot-dipped galvanized or zinc coated nails

TIP: Use water repellent or stain with water repellent when your job is finished to help protect your pressure treated wood from splitting, checking, and warping.

Use fasteners and other hardware which are in compliance with building codes for the intended use.*

For important fastener information for ACQ treated products, please consult our Fastener Information sheets found in the lumber aisle or visit us online at www.greatsouthernwood.com.

For important information concerning mold growth on wood products, see the Important Information section below or visit www.epa.gov.

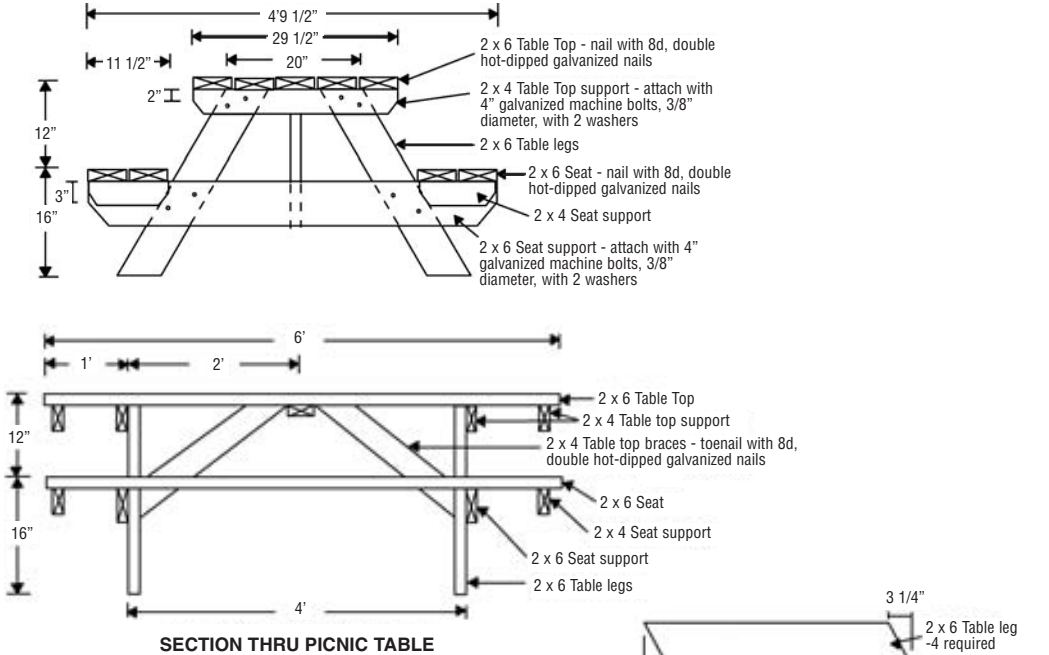

IMPORTANT INFORMATION

- Consult the end tag to determine which preservative or preservative system was used in the treatment of that particular product.
- Warning-Certain metal products (including fasteners, hardware and flashing) may corrode when in direct contact with some YellaWood® brand products. To prevent premature corrosion and failure, consult the end tag to determine which preservative or preservative treatment was used and it is important to follow the metal products manufacturers' recommendations (including Fastener Information Sheets, if any) of the manufacturers for all metal products as they relate to it relates the specific preservative or preservative system indicated on the end tag.
- Use fasteners, hardware or any metal products as recommended by their manufacturer. Reference the Fastener Information Sheet for manufacturer recommended products approved for use with ACQ or MCQ treated products.
- Use fasteners and other hardware that are in compliance with building codes for the intended use.
- Consult the end tag to determine which preservative or preservative system was used in the treatment of that particular product.
- Do not use preserved wood in direct contact with aluminum.
- Do not burn preserved wood
- Wear a dust mask and goggles when cutting or sanding wood.
- Wear gloves when working with wood.
- Some preservative may migrate from the treated wood into soil/water or may dislodge from the treated wood surface upon contact with skin. Wash exposed skin areas thoroughly.
- All sawdust and construction debris should be cleaned up and disposed of after construction.
- Wash work clothes separately from other household clothing before reuse.
- Preserved wood should not be used where it may come into direct or indirect contact with drinking water, except for uses involving incidental contact such as fresh water docks and bridges.
- Do not use preserved wood under circumstances when the preservative may become a component of food, animal feed or beehives.
- Do not use preserved wood as mulch.
- Only preserved wood that is visibly clean and free of surface residue should be used.
- If the wood is to be used in an interior application and becomes wet during construction, it should be allowed to dry before being covered or enclosed.
- If you desire to apply a paint, stain, clear water repellent or other finish to your preservative-treated wood, we recommend following the manufacturer's instructions and label of the finishing product. Before you start, we recommend you apply the finishing product to a small exposed test area before finishing the entire project to ensure it provides the intended result before proceeding.
- Mold growth can and does occur on the surface of many products, including untreated and treated wood, during prolonged surface exposure to excessive moisture conditions. To remove mold from the treated wood surface, wood should be allowed to dry. Typically, mild soap and water can be used to remove remaining surface mold. For more information visit www.epa.gov.
- Projects should be designed and installed in accordance with federal, state and local building codes and ordinances governing construction in your area, and in accordance with the National Design Specifications (NDS) and the Wood Handbook.

Disposal Recommendations: Preserved wood may be disposed of in landfills or burned in commercial or industrial incinerators or boilers in accordance with federal, state and local regulations.

Great Southern Wood Preserving, Inc. makes no warranties expressed or implied as to the fitness for a particular purpose of this plan. Projects should be designed and installed in accordance with federal, state and local building codes and ordinances governing the construction in your area, and in accordance with the National Design Specifications (NDS) and the Wood Handbook.

YellaWood®

Pressure Treated Pine

YellaWood® brand pressure treated products are treated either with Micronized Copper Quaternary (MCQ) using the MicroPro™ copper preservative system or with Alkaline Copper Quaternary (ACQ) preservative.

Ask dealer for warranty details. Great Southern Wood Preserving, Inc., its affiliates and subsidiaries and TSO providers, use Oscome, Inc. wood preserving products (MCQ and ACQ), methods, systems and technology in the treatment of YellaWood® brand products.

For more information visit www.oscome.com. For important handling and other information concerning our products or for a copy of the YellaWood® brand (MCQ and ACQ) Material Safety Data Sheet (MSDS), please visit us at www.greatsouthernwood.com or write us at P.O. Box 610, Abbeville, AL 36310. YellaWood® and the yellow tag are federally registered trademarks of Great Southern Wood Preserving, Inc. The Great Southern Wood Preserving, Inc. logo is a trademark of Great Southern Wood Preserving, Inc. MicroPro™ is a trademark of S-T-N Holdings, Inc.

YellaWood® is a registered trademark of Great Southern Wood Preserving, Inc. / © 2006 TSA: GSW-062-06 / October 2006